



## CENTREFIRE RIFLE CARTRIDGES

# GECO ZERO

**GECO .30-06 ZERO 8,8g**

Item no:	<b>2318821</b>
Bullet type:	<b>Fragmentation</b>
Bullet Weight:	<b>8.8 g / 136 gr</b>
Barrell Length:	<b>600 mm</b>
Ballistic Coefficient:	<b>0.229</b>
Caliber:	<b>.30-06 Spring.</b>
Unit size:	<b>20</b>
Lead:	<b>No</b>
Recoil:	<b>Light</b>
Usage for:	<b>Light Game</b> <b>Medium Game</b> <b>Heavy Game</b>

## HIGHLIGHTS

- Lead-free semi-jacketed bullet for all types of game
- Highly innovative jacketed bullet with two tin cores
- Hollow-point construction for high accuracy and best effectiveness
- Front tin core with radial arrangement of predetermined breaking points for a reliably rapid response and high instantaneous effectiveness
- Rear tin core with rear constriction for stability in the residual body and a secure exit wound

## DESCRIPTION

GECO ZERO is a highly effective and accurate, lead-free bullet for all types of game.



## BALLISTIC DATA

### Metric


Velocity		Energy		Zero Range		
V0 [m/s]	<b>920</b>	E0 [J]	<b>3724</b>		<b>100m</b>	<b>MRD* 178m</b>
V50 [m/s]	<b>851</b>	E50 [J]	<b>3186</b>	50m	<b>-0.8</b>	<b>1.2</b>
V100 [m/s]	<b>785</b>	E100 [J]	<b>2711</b>	100m	<b>∅</b>	<b>4</b>
V150 [m/s]	<b>722</b>	E150 [J]	<b>2294</b>	150m	<b>-3.2</b>	<b>2.8</b>
V200 [m/s]	<b>662</b>	E200 [J]	<b>1928</b>	200m	<b>-11.1</b>	<b>-3.1</b>
V250 [m/s]	<b>605</b>	E250 [J]	<b>1611</b>	250m	<b>-24.2</b>	<b>-14.7</b>
V300 [m/s]	<b>551</b>	E300 [J]	<b>1336</b>	300m	<b>-45</b>	<b>-33</b>

### Imperial

Velocity		Energy		Zero Range		
V0 [ft/s]	<b>3018</b>	E0 [ft/lbs]	<b>2747</b>		<b>100yds</b>	<b>MRD* 198yds</b>
V50 [ft/s]	<b>2810</b>	E50 [ft/lbs]	<b>2381</b>	50yds	<b>-0.4</b>	<b>0.3</b>
V100 [ft/s]	<b>2611</b>	E100 [ft/lbs]	<b>2056</b>	100yds	<b>∅</b>	<b>1.6</b>
V150 [ft/s]	<b>2420</b>	E150 [ft/lbs]	<b>1766</b>	150yds	<b>-0.8</b>	<b>1.5</b>
V200 [ft/s]	<b>2238</b>	E200 [ft/lbs]	<b>1510</b>	200yds	<b>-3.1</b>	
V250 [ft/s]	<b>2064</b>	E250 [ft/lbs]	<b>1285</b>	250yds	<b>-7.2</b>	<b>-3.3</b>
V300 [ft/s]	<b>1899</b>	E300 [ft/lbs]	<b>1087</b>	300yds	<b>-13.3</b>	<b>-8.7</b>



## Bullet construction of GECO ZERO

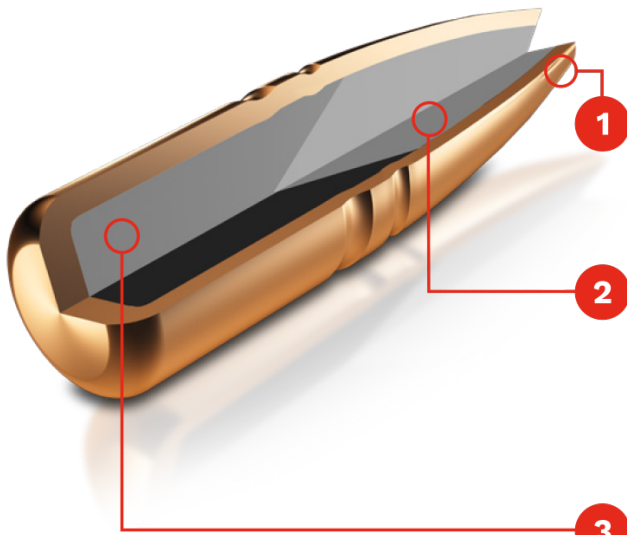

**1 GECO PERFORMANCE POINT:**

For accuracy and certain expansion

**2 PRE-FRAGMENTED TIN FRONT CORE:**

For reliable performance and solid stopping power

**3 REAR CANNELURE:**

For heigh weight retention and a certain exit wound

