



**CENTREFIRE RIFLE
CARTRIDGES**

GECO STAR

GECO 7x64 STAR 9,1g

Item no:	2420977
Bullet type:	Monolithic
Bullet Weight:	9.1 g / 140 gr
Barrell Length:	600 mm
Ballistic Coefficient:	0.220
Caliber:	7x64
Unit size:	20
Lead:	No
Recoil:	Medium
Usage for:	Light Game Medium Game Heavy Game

HIGHLIGHTS

- Lead-free deformation bullet
- The hollow-point design provides deformation you can count on from any distance
- High intrinsic precision and good game preservation
- GECO COPPER CORE provides maximum penetration and narrow flight path

DESCRIPTION

GECO STAR is a lead-free deformation bullet designed for maximum penetration and a high residual weight.



BALLISTIC DATA

Metric


Velocity		Energy		Zero Range		
V0 [m/s]	928	E0 [J]	3918		100m	MRD* 178m
V50 [m/s]	856	E50 [J]	3334	50m	-0.8	1.2
V100 [m/s]	788	E100 [J]	2825	100m	∅	4
V150 [m/s]	720	E150 [J]	2359	150m	-3.1	2.9
V200 [m/s]	655	E200 [J]	1952	200m	-11.1	-3
V250 [m/s]	596	E250 [J]	1616	250m	-24.8	-14.7
V300 [m/s]	543	E300 [J]	1642	300m	-45.4	-33.4

Imperial

Velocity		Energy		Zero Range		
V0 [ft/s]	3045	E0 [ft/lbs]	2890		100yds	MRD* 198yds
V50 [ft/s]	2828	E50 [ft/lbs]	2494	50yds	-0.5	0.3
V100 [ft/s]	2622	E100 [ft/lbs]	2144	100yds	∅	1.6
V150 [ft/s]	2417	E150 [ft/lbs]	1822	150yds	-0.8	1.5
V200 [ft/s]	2219	E200 [ft/lbs]	1535	200yds	-3.1	
V250 [ft/s]	2037	E250 [ft/lbs]	1294	250yds	-7.2	-3.3
V300 [ft/s]	1866	E300 [ft/lbs]	1086	300yds	-13.4	-8.7



Bullet construction of GECO STAR

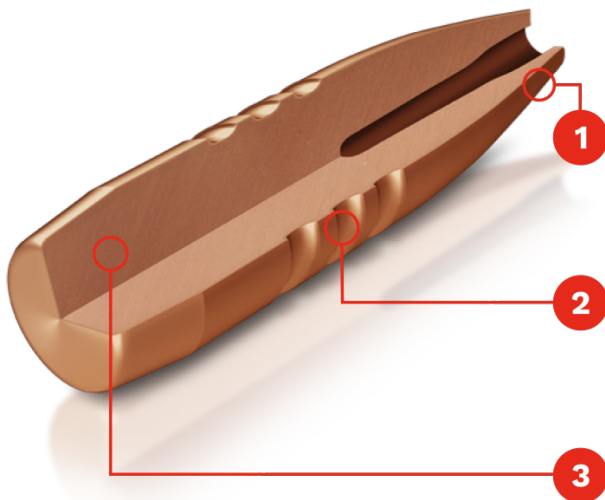

1 GECO HOLLOW POINT:

For reliable deformation at all distances

2 GECO GROOVES:

For maximum precision and optimum ballistics

3 GECO COPPER CORE:

For deep penetration and high knock down power

