



CENTREFIRE RIFLE CARTRIDGES

GECO STAR

GECO .300 Win. Mag. STAR 10,7g

Item no:	2413836
Bullet type:	Monolithic
Bullet Weight:	10.7 g / 165 gr
Barrell Length:	650 mm
Ballistic Coefficient:	0.387
Caliber:	.300 Win. Mag.
Packaging unit:	20
Lead:	No
Recoil:	Medium
Usage for:	Light Game Medium Game Heavy Game

HIGHLIGHTS

- Lead-free deformation bullet
- The hollow-point design provides deformation you can count on from any distance
- High intrinsic precision and good game preservation
- GECO COPPER CORE provides maximum penetration and narrow flight path

DESCRIPTION

GECO STAR is a lead-free deformation bullet designed for maximum penetration and a high residual weight.



BALLISTIC DATA

Metric


Velocity		Energy		Zero Range		
V0 [m/s]	921	E0 [J]	4538		100m	MRD* 193m
V50 [m/s]	879	E50 [J]	4134	50m	-0.9	1.1
V100 [m/s]	839	E100 [J]	3766	100m	∅	4
V150 [m/s]	802	E150 [J]	3441	150m	-2.6	3.5
V200 [m/s]	766	E200 [J]	3139	200m	-9	-0.9
V250 [m/s]	729	E250 [J]	2843	250m	-19.5	-9.5
V300 [m/s]	693	E300 [J]	2569	300m	-34.7	-22.6

Imperial

Velocity		Energy		Zero Range		
V0 [ft/s]	3022	E0 [ft/lbs]	3348		100yds	MRD* 210yds
V50 [ft/s]	2897	E50 [ft/lbs]	3077	50yds	-0.5	0.2
V100 [ft/s]	2776	E100 [ft/lbs]	2825	100yds	∅	1.5
V150 [ft/s]	2663	E150 [ft/lbs]	2600	150yds	-0.6	1.5
V200 [ft/s]	2553	E200 [ft/lbs]	2390	200yds	-2.5	0.4
V250 [ft/s]	2442	E250 [ft/lbs]	2186	250yds	-5.7	-2.1
V300 [ft/s]	2332	E300 [ft/lbs]	1994	300yds	-10.4	-6



Bullet construction of GECO STAR

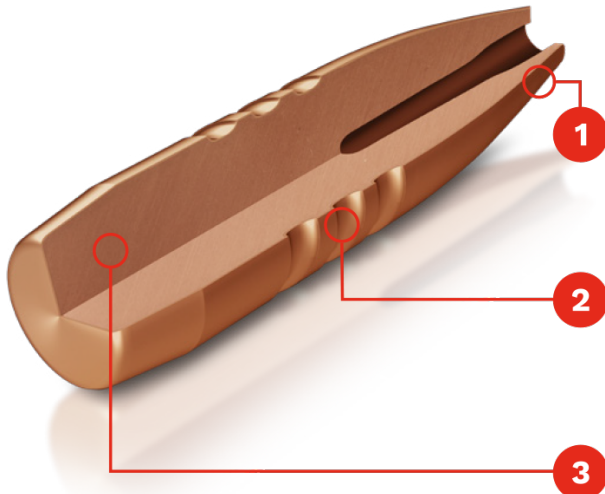

1 GECO HOLLOW POINT:

For reliable deformation at all distances

2 GECO GROOVES:

For maximum precision and optimum ballistics

3 GECO COPPER CORE:

For deep penetration and high knock down power

