



CENTREFIRE RIFLE CARTRIDGES

GECO STAR

GECO 8x57 IS STAR 10,4g

Item no:	2424729
Bullet type:	Monolithic
Bullet Weight:	10.4 g / 160 gr
Barrell Length:	600 mm
Ballistic Coefficient:	0.255
Caliber:	8x57 JS
Packaging unit:	20
Lead:	No
Usage for:	Light Game Medium Game Heavy Game

HIGHLIGHTS

- Lead-free deformation bullet
- The hollow-point design provides deformation you can count on from any distance
- High intrinsic precision and good game preservation
- GECO COPPER CORE provides maximum penetration and narrow flight path

DESCRIPTION

GECO STAR is a lead-free deformation bullet designed for maximum penetration and a high residual weight.



BALLISTIC DATA

Metric


Velocity		Energy		Zero Range		
V0 [m/s]	816	E0 [J]	3462		100m	MRD* 160m
V50 [m/s]	758	E50 [J]	2988	50m	-0.4	1.6
V100 [m/s]	703	E100 [J]	2570	100m	∅	4
V150 [m/s]	648	E150 [J]	2184	150m	-4.6	1.3
V200 [m/s]	596	E200 [J]	1847	200m	-15.1	-7.2
V250 [m/s]	547	E250 [J]	1556	250m	-32.6	-22.6
V300 [m/s]	503	E300 [J]	1316	300m	-58.3	-46.4

Imperial

Velocity		Energy		Zero Range		
V0 [ft/s]	2677	E0 [ft/lbs]	2554		100yds	MRD* 176yds
V50 [ft/s]	2504	E50 [ft/lbs]	2234	50yds	-0.3	0.5
V100 [ft/s]	2336	E100 [ft/lbs]	1945	100yds	∅	1.6
V150 [ft/s]	2171	E150 [ft/lbs]	1680	150yds	-1.3	1
V200 [ft/s]	2011	E200 [ft/lbs]	1441	200yds	-4.4	-1.3
V250 [ft/s]	1862	E250 [ft/lbs]	1236	250yds	-9.7	-5.8
V300 [ft/s]	1721	E300 [ft/lbs]	1055	300yds	-17.6	-12.9



Bullet construction of GECO STAR

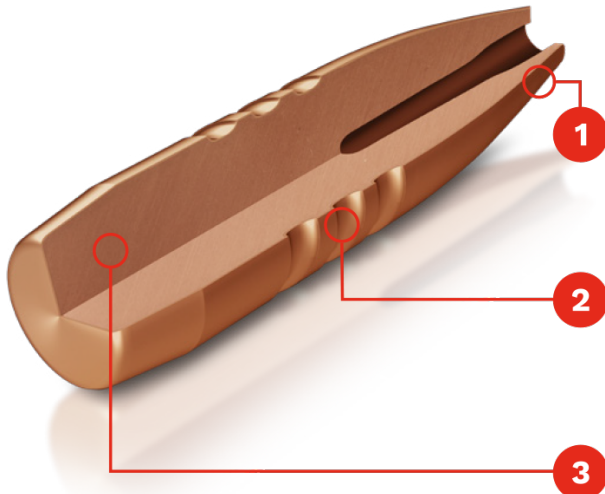

1 GECO HOLLOW POINT:

For reliable deformation at all distances

2 GECO GROOVES:

For maximum precision and optimum ballistics

3 GECO COPPER CORE:

For deep penetration and high knock down power

